

## Trailed Disc Mower Conditioners

---

**FC 1061 TC SERIES**  
**FC 1061 TL SERIES**



[www.kuhn.com](http://www.kuhn.com)



be strong, be **KUHN**



- FC** 2861 TLD/TLR/TLS    3161 TLD/TLR/TLS/TLV    3561 TLD/TLR/TLS
- FC** 3161 TCD/TCR/TCS    3561 TCD/TCR/TCS    4061 TCD/TCR/TCS    4461 TCD/TCR/TCS
- FC** 3161 TCD RA    3561 TCD RA

# DYNAMIC CUTTING FOR DYNAMIC PRODUCERS!



## INCREASED PRODUCTIVITY NEEDED FOR AN OPTIMUM BASIC RATION

How to remove forage from the field as quickly as possible to keep nutritional value to a maximum? That is the issue livestock farmers have to deal with in times of unpredictable weather conditions and increasing concentrate prices. With effective conditioning, KUHN's FC 1061 series provides a fast, clean cut of heavy grasses and delicate forage crops as well as quick dry-down. You save money and your machine is more profitable.

## LOOKING FOR FLEXIBLE MACHINES

KUHN mower conditioners adapt to various requirements: wide spreading, grouping two swaths, different swath widths...there are many possibilities.

## HOW COST-EFFECTIVE CAN A MACHINE BE?

The operational costs of these machines are reduced to a minimum as they have a lower power requirement than equivalent models. Maintenance costs are lower too thanks to the reliable OPTIDISC ELITE cutter bar and PROTECTADRIVE safety system. Ask any user to tell you about it.

## KUHN trailed mower conditioners in brief:

	Working width (m)	Model	Conditioner
<b>FC 2861 TLD/TLR/TLS</b>	2.67	Side drawbar	D: steel fingers R: SQUAREFLEX rubber rollers S: DOUBLE CRIMP steel rollers
<b>FC 3161 TLD/TLR/TLS</b>	3.10		
<b>FC 3561 TLD/TLR/TLS</b>	3.50		
<b>FC 3161 TLV</b>	3.10	Central drawbar	
<b>FC 3161 TCD/TCR/TCS</b>	3.10		
<b>FC 3561 TCD/TCR/TCS</b>	3.50		
<b>FC 4061 TCD/TCR/TCS</b>	4.00		
<b>FC 4461 TCD/TCR/TCS</b>	4.40		
<b>FC 3161 TCD RA</b>	3.10		Conditioner with steel fingers and conveyor with windrow-grouper unit (RA)
<b>FC 3561 TCD RA</b>	3.50		


# CENTRAL DRAWBAR: MAXIMUM OUTPUT

The FC 1061 series with central drawbar (TC) is available from 3.10 m to 4.40 m and can be fitted with different conditioner systems (steel fingers, SQUAREFLEX rollers and DOUBLE CRIMP rollers). You spend less time manoeuvring at headlands with these machines and your productivity increases by 10 to 15% compared to trailed mowers with a side drawbar! Working comfort and smooth running are far superior with the GYRODINE headstock, exactly what is needed to produce high quality forage. A conveyor and grouper unit is available on the smaller width versions (3.10 m and 3.50 m).

## ADAPT DELIVERY TO HARVESTING MACHINES

The machine is designed to handle large forage flows. It has three different delivery modes:

- Regular swaths with adjustable width.
- Wide delivery, extremely uniform. Changing from regular to wide delivery is easy and tool free (A). The swath shields for wide delivery are stored on the drawbar.
- Twin swaths with an overall width of 2.70 m on the FC 3161 (compatible with 3 m pick-up) and 3.50 m on the FC 3561 (B). Twin swaths are produced with fixed asymmetrical shields, available as an option.

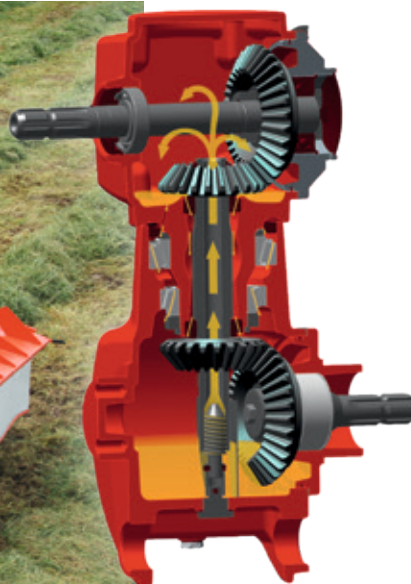

## GYRODINE: 90° AND DEPENDABLE

The heavy-duty GYRODINE swivel hitch allows turns in excess of 90° while keeping the PTO driveline straight. Maintenance requirements are low with only one oil change necessary. The machine is coupled to the lower tractor links with pins stopped from rotating. This hitch system is extremely dependable and ensures safe manoeuvres.



## EXCLUSIVE

### EASY ACCESS FOR REDUCED MAINTENANCE

The wide-opening front hood makes it easier to access machine components:

- Access the maintenance-free OPTIDISC ELITE cutter bar.
- Change your knives even more easily with the FAST-FIT system.

**profi**  
Professional. Uncompromising. Efficient.

### PROFI MAGAZINE SAYS

«It's easy to appreciate no longer having to divide a field into regular strips, especially without GPS.»

«A great deal of thought was put into the development of the FC 3160 TDC.»

«The different adjustments can be made with very few tools.»

«The bigger wheels are appreciable because this mower weighs 2,390 kg. Work output and the finish of the machine itself are excellent.»

*Source: PROFI, 4/2016, p.30-31*


# SIDE PULL: EVERYTHING YOU NEED

The FC 1061 series with side drawbar is available in working widths of 2.80 m to 3.50 m. Different types of conditioner produce fast dry-down of cut crops.

Advantages:

- Very smooth handling thanks to the GYRODINE headstock and side drawbar.
- Central or side delivery of swath or wide spreading.
- Conditioner options: steel fingers, SQUAREFLEX roller or DOUBLE CRIMP roller.

It is also a very economical machine, designed to ensure fast work output for farms with medium-sized plots.



## GYRODINE: 90° AND DEPENDABLE

The heavy-duty GYRODINE swivel hitch allows turns in excess of 90° while keeping the PTO driveline straight. Maintenance requirements are low with only one oil change necessary. The machine is coupled to the lower tractor links with pins stopped from rotating. This hitch system is extremely dependable and ensures safe manoeuvres.

# TWIN SWATHS LESS THAN 3 METRES IN WIDTH

With a 3.10 m cut, 2-speed finger conditioner and hydraulically-controlled swath shields, the FC 3161 TLV mower conditioner can deliver 2 swaths side by side by grouping 6 m of cut crop into a swath width that does not exceed 2.80 m: the ideal size for a forage harvester with a maximum pick-up of 3 metres.



## A MODEL FOR CONTRACTORS AND COOPERATIVES

Save time and money with this machine. Raking is no longer necessary and work output by the forage harvester is increased. Forage quality is improved: no more foreign bodies or soil brought into the forage during raking and less risk of stones causing mechanical breakdown.



## DRAWBAR ADJUSTS FOR AN OPTIMUM CUT

When you change the position of the swath shields the position of the drawbar adapts automatically. This means:

- The tractor wheels never run over the forage.
- The machine works the full cut width.
- You deliver a swath that is less than 3 metres and easy to collect by the pick-up.



## ONE HYDRAULIC VALVE LESS

Only two hydraulic valves are required to manage the machine as the FC 3161 TLV series is equipped with a circuit selector. The position of the shields can be controlled separately, as is necessary on steep slopes, for example, in order to adjust the point of forage delivery.

# LESS SOIL CONTAMINATION FOR TOP QUALITY FODDER



## REDUCE COSTS BY OPTIMISING BASIC RATION

Profits from livestock farming start with feed storage, in silos, bales or in bulk. The aim is simple: produce as much meat or milk as possible from the basic ration by increasing palatability. In order to do this, the sward must remain undamaged and forage must be as soil-free as possible. By concentrating on the technical details of these mower-conditioners, KUHN helps you get the most from your forage to increase your profitability.



### CONSTANT SUSPENSION OF CUTTING UNIT

The mowing unit is suspended by torsion bars on the FC 1061 series. It follows ground contours closely to produce an even cut and can be adjusted separately on both sides. This helps protect the sward and the machine, and keeps dirt out of the forage.



### PATENTED AN EVEN AND UNIFORM SPREAD

The rear of the conditioner hood is articulated. It is guided directly by the main frame to which it is connected so it remains at a constant height from the ground. It is independent from the movements of the cutter bar.



### GIVE SOIL AND GRASS COVER A BREAK

The ultra-large tyres exert very little pressure on the ground during operations and headland turns. The crop is preserved and soil compaction is avoided.



## THIS IS WHAT FC USERS ARE SAYING

Livestock farmers all over the world face different challenges but they have the same objectives for their forage harvest. They want to increase their productivity and improve efficiency in order to save money. Nothing is more effective than harvesting top quality crops. This is what they say:



**R. Brezzi,**  
*Piemont, Italy:*

«The FC 3160 TCR has not only improved hay and silage making on our farm, it has transformed it. We have worked with the machine on over 100 hectares and it has given us high productivity and perfectly formed swaths in spite of a very difficult season. Continuous rain, short operating windows, having to cut quickly without damaging the quality of the forage...we have been able to manage all of this with the new FC and we are very pleased. Even with high ground speeds of 15-18 km/h, you always get great quality forage.»



**J. Kujala,**  
*Southern Ostrobothnia, Finland:*

«We used the FC 3160 TCD for two cuts last year. We cut 700 hectares with the machine. Conditions were difficult in Finland last year because of heavy rain and very wet land, so we were very impressed by the low power requirement of the tractor. The extra-large tyres are absolutely necessary in wet conditions. With the enhanced suspension of the cutter bar, the cut was clean and precise!»



**S. Brown,**  
*Queensland, Australia:*

«As dairy farmers, we really appreciate this machine for its capacity to handle large volumes of forage, to maintain a reasonable speed, for its high quality conditioning with the rotor with steel fingers and for its clean cut. The overall size of the machine (heavy duty gearbox and cutter bar) is an advantage too.»



be strong, be **KUHN**

## KUHN PARTS

Designed and manufactured to rival time



KUHN foundries and forge as well as a high-level manufacturing process allow the production of spare parts to defy time. You can truly rely on our know-how and our genuine parts. Farmers benefit from our client support and logistics services via any KUHN PARTS warehouse, which provide quick and reliable repair solutions in cooperation with your nearest authorised KUHN dealer.



# OPTIDISC ELITE: THE OPTIMUM CUT


The OPTIDISC ELITE cutter bar was developed with the close collaboration of farmer users. It is a solution that combines cutting quality, operating comfort and is highly reliable.

The requirements of large farms and contractors have been more than met:

- Lubricated for life.
- Perfectly adapted to high-powered tractors.

## GREAT CUTTING QUALITY !

KUHN'S OPTIDISC ELITE cutter bar is an excellent example of added value created through the close collaboration between manufacturer and farmer. It is a solution that combines unrivalled cutting quality, operating comfort and is highly reliable. Being lubricated for life and adapted to high-powered tractors, this cutter bar meets the requirements of large farms and contractors.

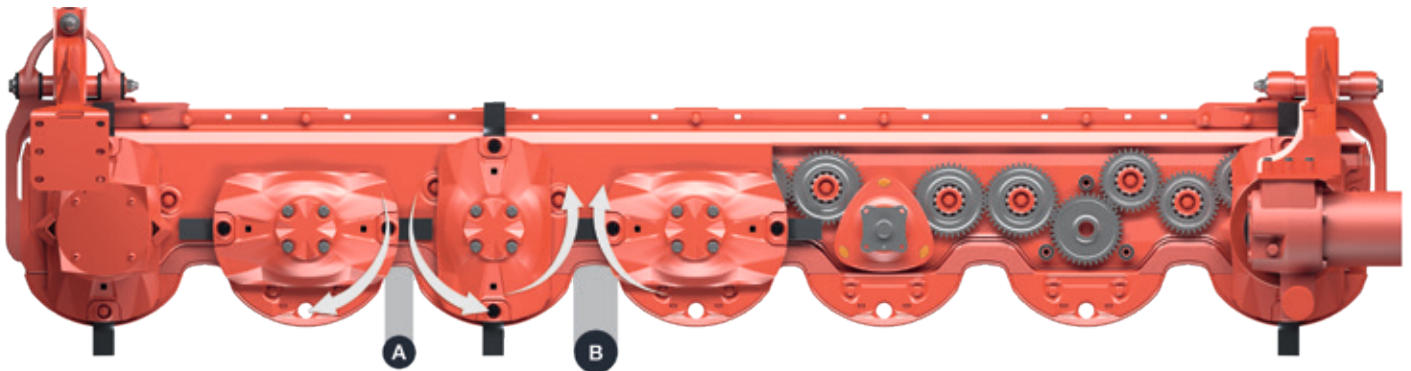

### MINIMUM DISTANCE FOR A CLEAN CUT

Spacing is reduced at the point where the discs diverge **(A)** to increase knife overlap. This results in a clean cut even in light or short grasses.

### MAXIMUM DISTANCE FOR EASY CROP PASSAGE


Distance is increased at the point where the discs converge **(B)**. This provides more space for the crop to pass through which is quickly carried away to the rear so that the mower can do its job undisturbed.



### EXCLUSIVE

### SMOOTH RUNNING

In wet ground, earth can build up in front of the cutter bar, but not with OPTIDISC ELITE! It is equipped with skids designed to improve smooth running. Plant cover is protected, forage quality is high, and a regular cut is ensured, even in difficult conditions.

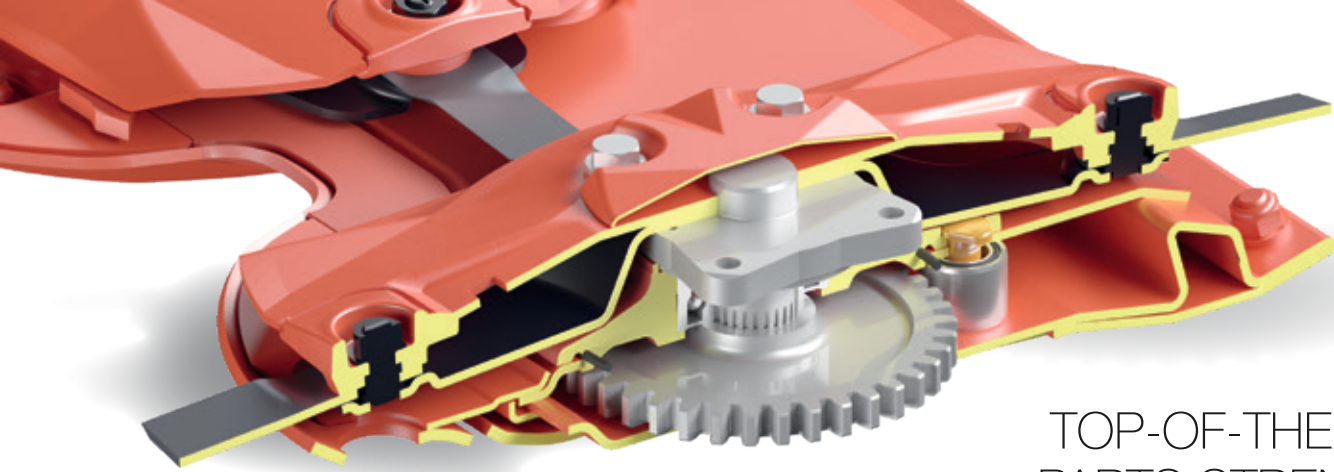


## TOP-OF-THE-RANGE PARTS STRENGTHEN THE HEART OF THE CUTTER BAR

### A CUTTER BAR TO RELY ON

Top-of-the-range parts strengthen the heart of the cutter bar:


- Disc-bearing station with double-row angular contact ball bearings.
- Large-diameter gear wheels in high-precision forged steel with 3 teeth intermeshing.
- Discs with forged and heat treated cups over the whole surface area.
- Disc skids in treated steel with the option of adding protection (screw fastening).
- PROTECTADRIVE safety.

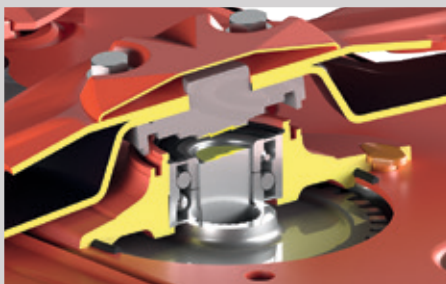

#### SAFETY

#### PROTECTADRIVE: PROTECTS AND REDUCES COSTS


In the event of a violent impact between a disc and an obstacle, the shaft holding the disc can shear just above the bearing thanks to a specially designed shear groove. The gearwheels are protected. In less than 15 minutes, the machine is operational again at a very low repair cost.

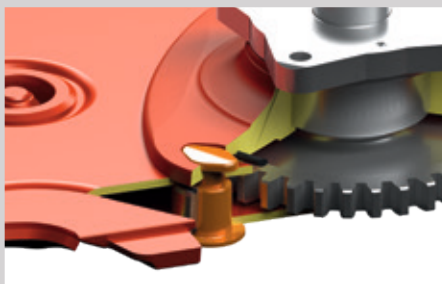

#### EXCLUSIVE

#### EXTRA RIGID WHERE IT COUNTS!

The disc bearing stations are attached by long screws that go through the cutter bar. It is a solution that prevents them from being pulled out of the cutter bar in the event of an impact. The disc-drive pinion remains securely in place and repair costs are reduced.

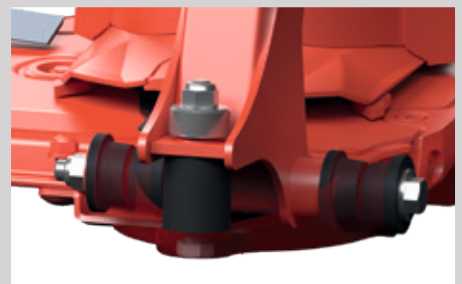

#### EXCLUSIVE

#### FOR A LONGER MACHINE LIFE

Shock absorbers between the cutter bar and the main frame are highly effective when mowing at high speeds.



#### FAST-FIT: 100% SAFE KNIFE ATTACHMENT


Mowers are equipped with FAST-FIT knives as standard. A powerful leaf spring puts constant pressure on the knife retainer for increased securement, and knives are changed in no time at all.



#### KNIVES FREE TO ROTATE

For better cutting quality and a longer life, the knives rotate freely 360°.

# A GREAT CONDITIONER SELECTION

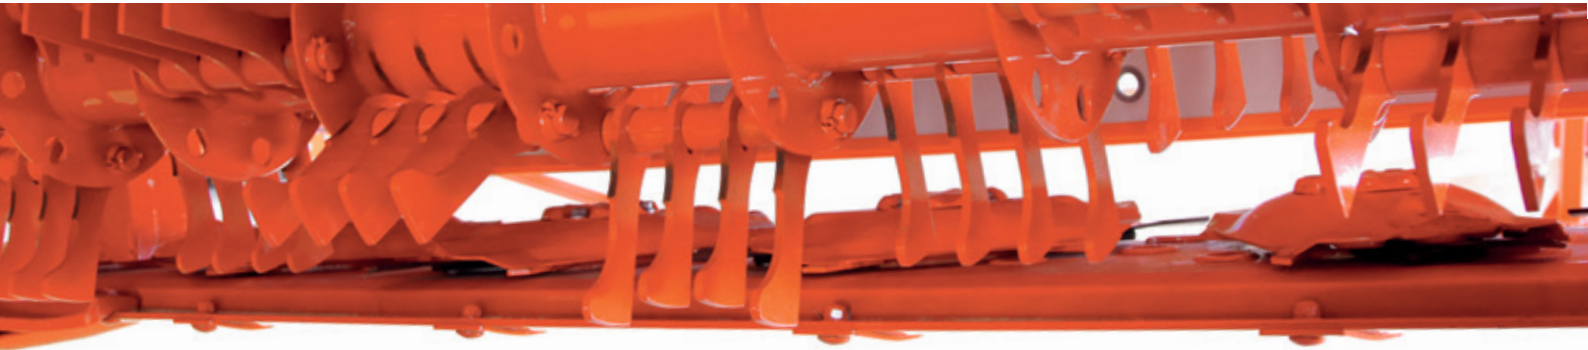

## DIGIDRY PIVOTING FINGERS IN STEEL FOR TOUGH CONDITIONS

Steel fingers are highly effective in heavy, long and mature forage as well as in short forage. The conditioner's high-capacity intake produces smooth forage flow through the machine. Power requirement for this type of conditioner is kept low with quicker forage passage and no need for recirculation. Well-structured, fluffy swaths are created by the position of the fingers that fluff up the forage, sending it up in the air before it comes down to form the swath. Result : well-shaped and airy swaths that dry out quicker to produce more energy and nutrient-rich forage. With suitable conditioner settings (reduced speed), steel fingers can also work alfalfa.



### KUHN PLUS

#### UNRIVALLED SWATH DELIVERY

The conditioner hood is guided directly by the machine's main frame. Swath delivery is not affected by the cutter bar's movements so it is more regular.

#### CONDITIONING INTENSITY SET IN A FEW SECONDS

To adapt conditioning to forage requirements you just have to set the two-speed selector. Reduce rotor speed for legumes (780 min<sup>-1</sup>) and speed it up for dense grasses (1000 min<sup>-1</sup>).



# ADAPTED TO YOUR NEEDS

## ROLLERS: GENTLE CONDITIONING OF DELICATE CROPS


One of the best ways to reduce concentrates in feed is to integrate plant protein into it. Legumes are ideal for this, as long as the leaves are retained in the harvest. Tests carried out by Arvalis (French Institute), the Chamber of Agriculture and the FD machinery co-operative highlight the benefits of rollers.

### ROLLERS SAVE AROUND €100/HA/CUT

Losses caused through crop operations are reduced by using rollers (tight swaths). For a well-balanced ration, it is necessary to buy concentrate to make up for leaf loss. Depending on the price of raw materials, the cost can be as much as 100 Euros/ha, so it is definitely worth considering a conditioner with rollers!

### HARVEST EARLIER!

The mower-conditioner with rubber rollers produced 80% of dry matter by the second evening as opposed to the third evening for the other methods.

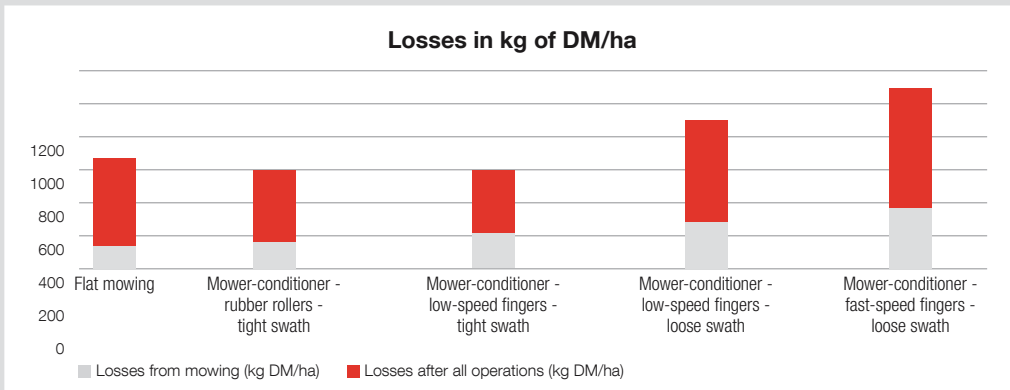

### RUBBER AND STEEL

- In rubber, with the exclusive SQUAREFLEX (TLR/TCR) design.
- In steel, with the DOUBLE CRIMP (TLS/TCS) ROLLER.

They grip the plant evenly to allow the humidity to escape. The whole process is gentle in order to retain the nutritional value of delicate forage crops such as legumes and immature rye.

Their large 240 mm diameter makes them very robust as well as improving forage circulation.

Pressure between the rollers can be adjusted from 100 to 500kg/m to suit the type of forage and conditioning intensity desired.

### PATENTED

### SYNCHRONISED MAINTENANCE-FREE DRIVE

The roller drive system contains gearwheels only. The two rollers are perfectly synchronised, unlike belt or chain systems. This is an important advantage with respect to roller life and the elimination of vibrations. The drive housing is also protected by a KUHN-exclusive shear bolt. Even in the event of impact with a foreign body, the machine and its drive are protected.





# SWATHING WITHOUT RAKING

The FC 3161/3561 TCD RA models are designed for professional use by contractors, large operations and machinery cooperatives. Their rear grouper unit makes them ideal for harvesting all silage crops. They also provide maximum flexibility with different delivery options.

## ADAPT DELIVERY TO HARVESTING MACHINE

A grouper belt gathers two swaths as soon as they are cut in order to form:



1 A twin swath for pick-up by a silage harvester.



2 A narrower swath for pick-up by a baler or loader wagon.

## SAVE TIME AND IMPROVE FORAGE QUALITY

Using the grouper belt means one less pass with the rake later on and results in better quality forage:

- no additional leaf loss during raking.
- no incorporation of soil or foreign bodies in the swath.



## KUHN PLUS

### FORAGE DELIVERY TO THE LEFT OR RIGHT

The grouper belt is positioned to the rear of and parallel to the mowing unit so cut crop can be delivered to the right and the left. In combination with a front mower it is easier for the driver to keep the front unit aligned with the uncut forage. The belt can be lifted, run faster or slower at any time to adapt to the amount of uncut crop or slopes.



### STAY RELAXED IN THE CAB

Mower-conditioner adjustments are very easy. All functions required to monitor the machine and its grouper are centralised on a control box in the tractor cab. The control box comes as standard. Among its most important functions are belt-speed control and direction of delivery.

### AUTONOMOUS HYDRAULIC DRIVE

The conveyor belt is driven by an integrated hydraulic unit whose pump is powered by an output on the GYRODINE headstock. This drive system is a real advantage for machinery cooperatives and contractors as the machine can easily adapt to different tractors. Tractor oil supply problems? Never again!



**FC****4061 TC****4461 TC**

# GREAT OUTPUT. MINIMUM POWER REQUIREMENT.

FC 4061 AND 4461 machines at widths of 4.00 m and 4.40 m respectively are designed for tractors from 130 hp. Large forage operations appreciate their high productivity and low power requirement at these widths.



## LARGE-WIDTH MODEL OF THE FC 1061 SERIES

It has all the features of the FC 1061 with central drawbar.



### OPTIDISC ELITE: THE OPTIMUM CUT

The OPTIDISC ELITE cutter bar, maintenance-free, is equipped with the FAST-FIT knife quick blade release system. To avoid knife-related costs, the PROTECTADRIVE safety system protects the gearwheels. In the event of a violent impact between a disc and an obstacle, the disc shaft can shear just above the bearing thanks to a cleverly designed shear groove.

### GYRODINE: 90° AND DEPENDABLE

The GYRODINE headstock facilitates 90° manoeuvres.





## CHANGE DELIVERY MODE

Different delivery modes are possible:

- Swathing,
- Wide spreading.



### STABLE ON DIFFICULT TERRAIN

The FC 4461 is equipped with large twin wheels that:

- Ensure the machine is less subject to sinking on the plot and to prevent wheel tracks if pivot irrigation is used.
- Protect plant cover in wet conditions.
- Provide stability on bumpy ground and dirt paths.



### A CONDITIONER THAT ADAPTS TO YOU

Three types of conditioner can be fitted to FC 4061 and FC 4461 machines. The DIGIDRY conditioner with steel fingers is best in difficult conditions. For legumes and delicate forage crops, opt for the conditioner with the SQUAREFLEX rubber roller or the DOUBLE CRIMP steel roller conditioner.

# OPTIONAL EQUIPMENT

## Specifications

FC 3161 TCD 3561 TCD



### ADJUSTABLE RAISED SKIDS

Machines can be equipped with lifting skids to adjust cutting height in difficult conditions from 80 to 150mm.

FC 3561 TCR/TCS 4061 TCR/TCS 4461 TCR/TCS



### WIDE SPREADING KIT

A shield with deflector fins can be fitted to the rear of the machine. The fins pivot automatically (except FC 4061 and FC 4461) when the drawbar cylinder is adjusted. With this system, forage is spread in an even layer over a large width for fast dry-down.

FC 1061 TL 1061 TC



### HYDRAULIC CONTROL OF CUT HEIGHT

For particular mowing conditions (stony areas, flattened grass,...), cut height can be modified hydraulically. An indicator shows the cut height.

Model	
Working width (m)	
Number of discs with protective skids	
Knife attachment	
Disc bearing stations removable from the outside	
Conditioning system	
Conditioner rotor speed (min-1)	
Conditioner drive	
Swath width, min, max (m)	
Wide spreading system	
Cutting height adjustment	
Suspension adjustment	
Tyres	
Transport width (m)	
Lighting and signalling	
Attachment	
PTO drive	
PTO speed (min-1)	
Free wheel	
Min. PTO requirement	
Tractor hydraulic requirement	
Weight (kg)	TLD
	TCD
	TLV
	TLR
	TCR

◆ standard ◇ option - not available

**Optional equipment:** wide angle secondary PTO shaft for TM models - asymmetrical swath shields for 3161/3561 TCD - wide spreading kit for FC 3161 - 3561 - 4061 - 4461 TCR/TCS - adjustable raised skids..

FC 2861 TL	FC 3161 TC / TL	FC 3161 TLV	FC 3161 TCD RA	FC 3561 TC / TL	FC 3561 TCD RA	FC 4061 TC	FC 4461 TC
side-pul	centre-pivot or side pull	side-pull	centre-pivot	centre-pivot or side pull		centre-pivot	
2.67		3.10		3.50		4.00	4.40
6		7		8		9	10
FAST-FIT quick release knife system							
◆ (PROTECTADRIVE safety included)							
TLD / TCD / TLV: pivoting steel fingers; TLR / TCR: SQUAREFLEX rubber rollers; TLS / TCS: steel rollers							
TLD / TCD: 780 and 1,000 (adjustable by selector lever); TLR/TCR/TLS/TCS: 780							
by gear housing with anti-lock safety							
0.90 to 1.90	0.90 to 2.30	single swath: 0.90 to 1.80 twin swath: 2.70 to 2.80	0.90 to 2.30			1.10 to 2.70	
◆ (TLD/TCD); ◇ (TCR/TCS); - (TLR/TLS/TLV)							
centralised by rod, direct indication							
with torsion bar, separate left / right adjustment							
11.5 / 80x15.3	400 / 60x15.5 (TC); 380 / 55x17 (TL)	380 / 55x17	400 / 60x15.5	400 / 60x15.5 (TC); 380 / 55x17 (TL)	400 / 60x15.5		4 wheels 11.5/80x15.3
2.55		3.00		3.50		4.02	4.45
◆							
GYRODINE headstock - 2-point, cat. 2 and 3; compatible Quick-hitch, cat. 2							
1 3/8" - 6 splines as standard; 1 3/8" - 21 splines as option							
540	1,000 (TL: 540 as option)			1,000			
integrated in the drive gearbox							
48 / 65	55 / 75		60 / 82	62 / 84	67 / 91	69 / 94	76 / 103
1 x SA + 1 x DA							
1,980	2,160	-	-	2,280	-	-	-
-	2,390	-	2,890	2,540	3,050	2,680	2,830
-	-	2,160	-	-	-	-	-
2,090	2,260	-	-	2,390	-	-	-
-	2,500	-	-	2,615	-	2,745	2,905

## KUHN SERVICES\* Maximise the use and productivity of your KUHN equipment

\*Not all services and equipment are available in every country.

### KUHN sos order

#### EXPRESS SPARE PARTS SERVICE 24/7

You urgently need spare parts? With KUHN SOS ORDER benefit from express delivery seven days a week, 365 days a year. Thus, you can minimise machine downtime considerably and increase your work output.

### KUHN protect +

#### THE CHOICE OF PROFESSIONALS!

Benefit from 36 months in complete serenity because of KUHN's PROTECT + warranty. You can concentrate exclusively on your work and the performance of your machine. Because this is what you expect, when investing in high-tech machinery.

### KUHN i tech

#### FOR EVER QUICKER REPAIRS!

An unexpected technical problem always occurs at the wrong time. Your KUHN dealer can support you quickly and efficiently thanks to KUHN i tech. With this 24/7 online service, a quick and exact diagnosis is possible

### KUHN finance


#### INVEST RATIONALLY!

New machine necessary, financing unsure? Modernise your equipment and develop your farm with KUHN FINANCE, in total safety and according to your needs and demands. We offer custom-made finance solutions, adapted to your requirements.

KUHN

APPS

# SMALL PROGRAMS WITH GREAT IMPACT

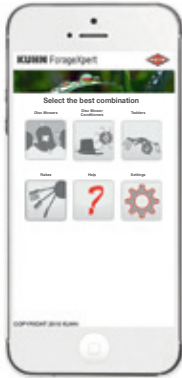

## FOR A POWERFUL FORAGE HARVESTING CHAIN

The forage harvesting chain is only as strong as its weakest link. It's important that all machines do well interlock. In this context, the KUHN ForageXpert app can support you in optimising your harvest system according to your current equipment. With this tool you can quickly find the mower, mower conditioner, tedder and rake that are best adapted to your existing forage machines.

Available on the Apple Store as well as Google Play.





## Check out the whole KUHN range of mowers and mower conditioners!



1. Front disc mowers 2. Horizontal fold disc mowers 3. Vertical fold disc mowers 4. Triple gang disc mowers 5. Front disc mower conditioners 6. Mounted disc mower conditioners 7. Triple gang mower conditioners 8. Drum mowers

For more information about your nearest KUHN dealer, visit our website [www.kuhn.com](http://www.kuhn.com)

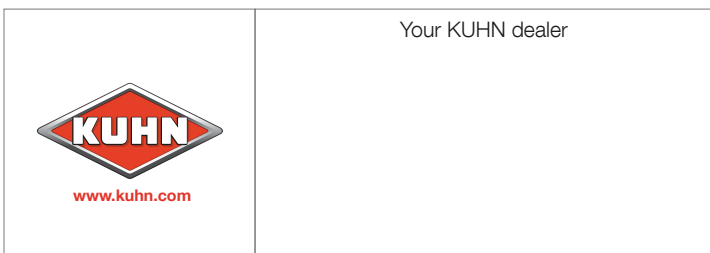

**KUHN S.A.**  
4 Impasse des Fabriques - BP 50060  
F-67706 Saverne CEDEX - FRANCE

**KUHN NORTH AMERICA, INC.**  
1501 West Seventh Avenue - Brodhead,  
WI 53520 - USA

**KUHN FARM MACHINERY PTY. LTD**  
313-325 Foleys Road - Deer Park, VIC, 3023 - AUSTRALIA

**KUHN FARM MACHINERY (U.K.) LTD**  
Stafford Park 7 - GB TELFORD/ SHROPS TF3 3BQ

Information given in this document is only for information purposes and is non-contractual. Our machines are in compliance with regulations in force in the country of delivery. In our literature, and for improved illustration of certain details, some safety devices may not be in operating position. When operating these machines, these devices must be in position in accordance with the requirements indicated in the operator's manuals and assembly manuals. Respect the tractor gross vehicle weight rating, its lift capacity and maximum load per axle and tyres. The tractor front axle load must always comply with the regulations of the country of delivery (In Europe, it must reach minimum 20 % of the tractor net weight). We reserve the right to change any designs, specifications or materials listed without further notice. Machines and equipment in this document can be covered by at least one patent and/or registered design. Trademarks cited in this document may be registered in one or several countries.

Also find KUHN on